




PSA-3402

Compact PowerSync Analyzer

IEEE 802.3at & 802.3bt Power over Ethernet

Product Overview

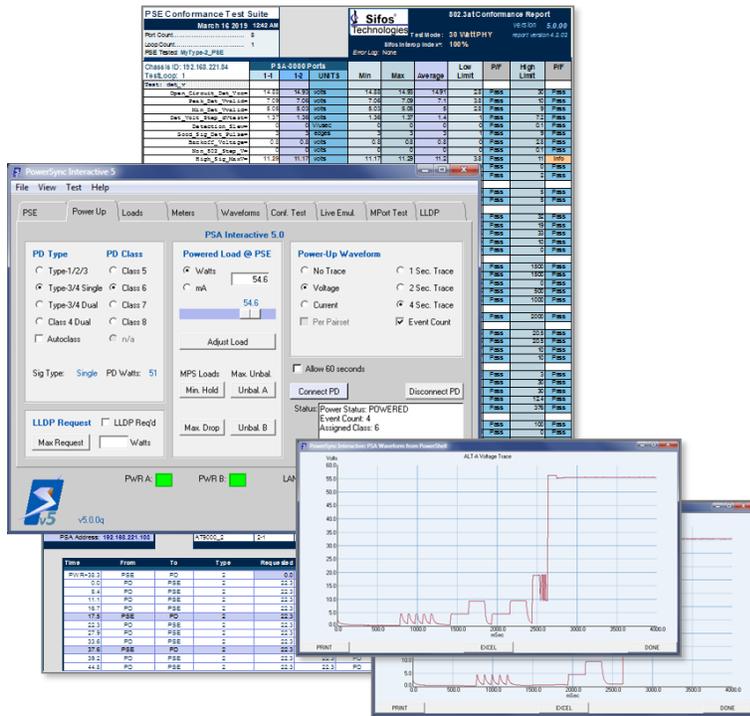

Key Features

- ❑ Industry Leading IEEE 802.3at PoE PSE Conformance Tests
- ❑ Flexible 802.3at / 802.3bt Powered Device Emulation Including PoE LLDP
- ❑ Continuous 2-Pair PSE Loading > 47 Watts Per Test Port (2 Test Ports)
- ❑ Continuous 4-Pair PSE Loading to > 99 Watts (Either Test Port)
- ❑ Replaces All General Purpose Test Equipment & Fixtures
- ❑ One-Click 2-Pair and 4-Pair PSE Waveform Analysis
- ❑ Automated PoE LLDP Protocol Analysis
- ❑ High Level Script Automation and Powerful Graphical User Interface
- ❑ Flexible and Accurate Measurements of Voltage, Current, Noise
- ❑ Noise Immune Triggering, Transients, and Time Interval Measurements
- ❑ Supports PSE Packet Transmission Testing with PoE Loads
- ❑ Small, Light Weight, Transportable with Built-In Power Supply
- ❑ Smart Fan Control – Runs Cool and Quiet

Verification, Simplified.

Overview

IEEE 802.3at and 802.3bt PSE's

End-Spans

Mid-Spans

PoE Connectors

Injectors

Fully Automated 802.3at PSE Conformance Test

Comprehensive Hardware /

Firmware DV Testing

Device Qualification

LLDP Protocol Analysis

Interoperability Analysis

Quality Assurance

Compact but Capable

Visualize Common 802.3at
and 802.bt (4-Pair) PSE
Behaviors and Responses

Prototype Tests and
Software for PSA-3000

Troubleshoot PSE Ports
Anywhere

Portable PoE Service Analyzer

Automated PoE Service
Outlet Interoperability
Analysis

Power-over-Ethernet (PoE) challenges design and test engineers to evaluate multi-channel, "intelligent" DC power sources that are activated and deactivated through signaling protocols operating over several power delivery and polarity configurations. The application and management of DC power over multiple local area network connections must be completely transparent and non-disruptive to the traditional data transmission functions of those network connections.

One Box Solution

Sifos Technologies provides a **one-box solution** to facilitate complete testing and analysis of Power Sourcing Equipment (PSE) behaviors including overall compliance to all **IEEE 802.3at** and **802.3bt** specifications. Each test port inside a PowerSync Analyzer is an autonomous and fully isolated instrument offering a rich set of stimulus and measurement resources for 2-Pair PSE testing. Furthermore, either PSA-3402 test port can be configured as an autonomous and fully isolated instrument for testing a single 4-Pair port from an **802.3bt** PSE or a pre-standard 4-Pair PSE.

Automated PSE Conformance Testing

The PSA-3402 may be optioned via a license key to run the world's most advanced 802.3at **PSE Conformance Test Suite**. This fully automated application applies the PowerSync Analyzer's diverse resources to assess over 70 IEEE 802.3at specification parameters per port, presented in easily readable spreadsheet reports with multi-port statistics and clearly notated pass/fail limit analysis. The PowerSync Analyzer and the PSE Conformance Test Suite may be used to qualify PSE's for the Ethernet Alliance PoE Logo under the Ethernet Alliance PoE Certification Program.

Analyzing 802.3bt PSE's

The PSA-3402 offers capability to fully emulate emerging 802.3bt compliant PD's for the purpose of testing new Type-3 and Type-4 PSE's that can provide over 90W of power using four wire pairs. New **PSA 5.0** software opens the door to comprehensive 802.3bt PSE analysis and automated test development. With several mouse clicks, virtually any 802.3bt PD can be emulated and PSE responses to PD emulations can be evaluated. A rich set of standardized **one-click waveforms** and **one-button test loads** make swift work of exposing new 802.3bt PSE's to the vast array of PD's and connection environments described under the 802.3bt standard.

LLDP Emulation for 802.3at and 802.3bt

The IEEE 802.3at and 802.3bt specifications describe PSE's and Powered Devices (PD's) that communicate precise power demands and allocations using Ethernet layer 2 (LLDP) protocols. The PSA-3402 may be optioned via a license key to flexibly emulate PD's and to analyze the power negotiation protocols between PSE's and PD's.


Start Small and Grow

The PSA-3402 is well suited to early device qualification and design verification applications as well as to field application and support activities. Test plans and software developed with the PSA-3402 are readily extendable into PSA-3000 (24-port) and PSA-3248 (48-port) test platforms.


Verification, Simplified.

PowerSync Analyzer Test Equipment Setups

PSE DV, QA Test

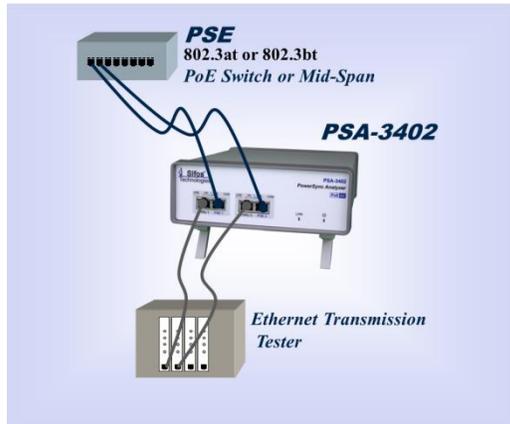

PSE Magnetic Bias Tolerance

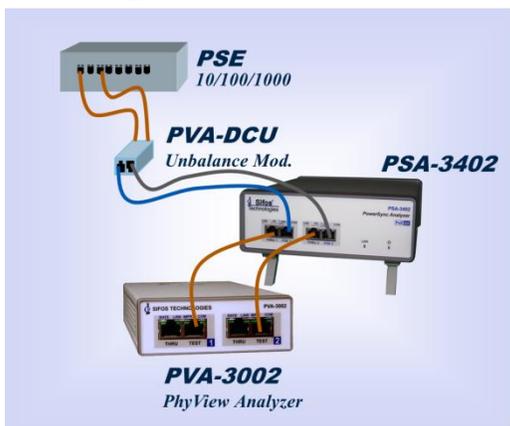

PoE Service Analysis



Per-Port PSE Test Resources

Flexible 2-Pair and 4-Pair PD Detection & Class Emulation including all 802.3bt PD Types

Flexible Loads and Load Transients including 4-Pair PSE Loads to > 99 Watts on Either Test Port

Event or Edge Triggering of Load Transients & Measurements

Average, Peak (Min/Max), and Trace Measurements of Port Voltage and Load Current with Flexible Sampling Apertures

Standard One-Click Waveforms for Rapid PSE Analysis and Conformance Troubleshooting

Flexibly Triggered, Noise-Immune Time Intervals / Slews

One-Button Specialized Loads

LAN Termination, LLDP Protocol Emulation and Tracing

Concurrent Packet Transmission and PoE Load Testing

802.3at PSE Conformance Suite*

High Coverage, Fully Automated IEEE 802.3at PSE Compliance Testing and Analysis (including LLDP*)

23 PSE Tests Producing Over 70 802.3at Parameters / Port

Automated Test and Port Sequencing with Comprehensive, Colorful Spreadsheet Reporting

Automatically Adapts to PSE Device Technologies

> 95% 802.3at PSE PICS Coverage

Regularly Updated with Sifos Tracking Service

Approved for Ethernet Alliance 1st Party (self) Certification Testing of 802.3at PSE's



LLDP*, PHY, Transmission Test Support

Flexible, Per-Port, Programmable PD LLDP Emulation for PoE with Payload, Timing, & Synchronization Control

Fully Automated LLDP Protocol Traces and Analysis

Emulate 802.3at and 802.3bt LLDP Protocols

Test Port "THRU" Channel for 10/100/1000 PHY Testing (using the Sifos PVA-3000) and Packet Transmission Testing

Negligible Thru-Channel Impairment (10/100/1000/2.5GBase-T)

PoE Service Analyzer for 802.3at

Comprehensive Evaluation of PoE Service at a PD Interface

PoE Service Interoperability Analysis

Colorful Spreadsheet Reporting

Powerful Software

PSA Interactive GUI for Control of all Test & Diagnostic Resources

Automated Test Menus for PSE Conformance and PoE Service Test Suites

Comprehensive, User-Friendly PowerShell PSA Script Development and Execution Environment Built on Tcl/Tk

* Available as an optional feature to the PSA-3402. See feature-specific data sheet.


PSA Interactive Graphical User Interface

The Sifos **PSA Interactive** graphical user interface (GUI) is a flexible and powerful tool that enables users to access and manage many of the resources and testing functions available in a PSA-3000 instrument. **PSA 5.0** software introduces a second generation of PSA Interactive offering the following key features:


- Intelligent Management of 2-Pair and 4-Pair PSE Connections
- Seamless Integration Between 802.3at and 802.3bt PSE Testing Processes
- Seamless Integration of Newer PSA-3202 Test Blades and Older PSA-3102 Test Blades
- Ergonomic Tab Menu Scheme
- Highly Flexible PD Emulations and PSE Stimulus-Response Assessments
- Full Support for All 802.3at Automated Test Suites and Analyses Previously Supported Under PSA 4.x Software
- Floorplan for Future 802.3bt Automated Test Suites

Included in the second generation PSA Interactive GUI is an intelligent **Slot-Port Selection Panel** and a tab menu window with nine tab menus:

- **PSE:** Learn, Declare, Load, and Save **PSE Attributes** that are essential to test port configuration and to automated test functions and utilities
- **Power Up:** Flexibly emulate and then connect **802.3at**, **802.3bt**, and **proprietary 4-Pair PD's** while observing PSE behaviors and responses to those PD connections
- **Loads:** Select and apply elemental signatures, static DC loads, and flexible load transients.
- **Meters:** Configure and perform a wide variety of measurements with a variety of triggering options
- **Waveforms:** Configure and capture a wide variety of one-click waveforms that perform stimulus-response evaluations of **802.3at** and **802.3bt** PSE's. Flexibly emulate 802.3at, 802.3bt, and proprietary 4-pair PD's

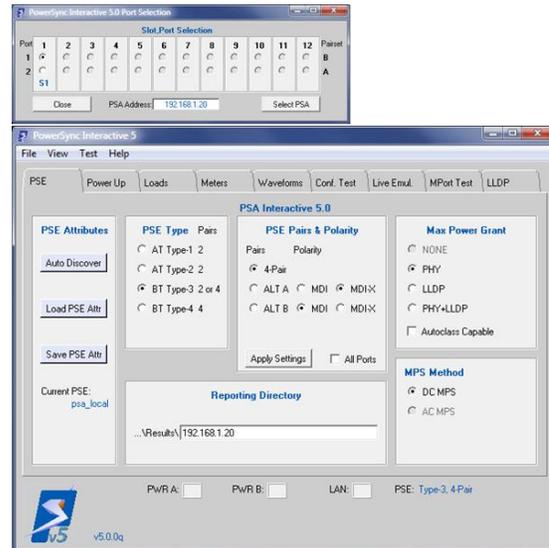

PSA Interactive Tab Menu and Slot-Port Panel

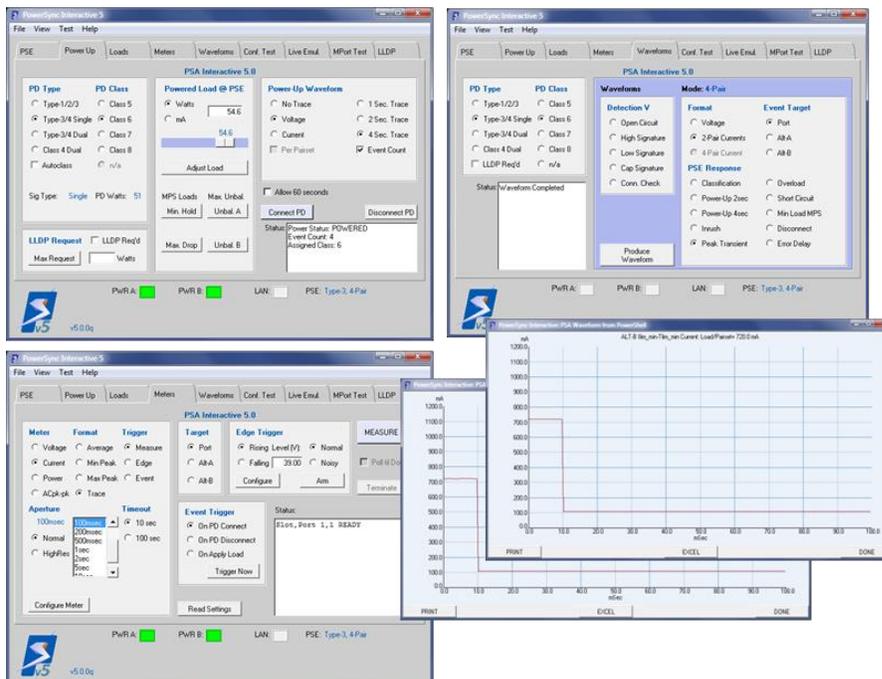

PSA Interactive Menus for Power Up Emulation, Measurements & Triggering, and One-Click Waveforms

- **Conf. Test*:** Configure and run the **802.3at** PSE Conformance Test Suite (using traditional PSA 4.2 menu)
- **Live Emul*:** (Multi-Port menus are not available to PSA-3402 instruments)
- **MPort Test*:** (Multi-Port menus are not available to PSA-3402 instruments)
- **LLDP*:** Configure and run **802.3at** LLDP protocol traces (using traditional PSA 4.2 menu)

* The **Conf. Test**, **Live Emul**, **MPort Test**, and **LLDP** tab menus will evolve to add resources for **802.3bt** PSE testing as those resources become available.

PowerShell PSA Tcl/Tk Interface

The PowerShell PSA Scripting Environment provides a high level, interactive means to control and program automated test sequences for the PSA-3402 PowerSync Analyzer. PowerShell enables fully automated testing suites that span multiple ports, blades, and instruments. Built upon the powerful and extensible Tool Command Language (Tcl), it offers an effective programming language well suited for automated testing.

PowerShell PSA provides a complete API for the PSA-3402 instrument including an extensive command set that ranges from elemental resource configurations to high level automated tests and test sequencers. Starting with PSA software version 5.0, PowerShell PSA seamlessly manages transitions between 802.3at (2-Pair) PSE testing and 802.3bt (4-Pair) PSE testing. Many PowerShell PSA commands and utilities automatically take on personalities governed by test port configurations (for example, **2-Pair** versus **4-Pair** and 4-Pair signature type).

PowerShell PSA can be integrated into broader Tcl environments that interlace traditional network transmission tests with Power-over-Ethernet tests. This enables seamless integration of custom or standard PSE tests with existing Tcl-based test suites

Other features offered by the PowerShell PSA environment include:

- Interpretive command execution (no compilation, easy debug)
- Simple, intuitive PowerSync Analyzer commands (API)
- Integrated and extensive command “help” features
- Smart prompt that tracks selected test port configuration
- Command-Knowledgeable Wish Console with PSA waveform viewer capability
- Notepad++ Editor Extension for PowerShell PSA script editing and debugging
- Flexible test suite sequencing including compound sequences
- Traditional Tcl Command Console
- Extensive PowerShell PSA command documentation



PowerShell PSA Wish Console

IEEE 802.3at PSE Conformance Test Suite


The IEEE **802.3at** PSE Conformance Test Suite is a library of **fully automated, flexibly sequenced, and self-adapting** tests that provide a high degree of specification compliance testing of PSE ports without the need for any external instrumentation. The PSE Conformance Test Suite may be used to fully assess interoperability of one or more PSE ports given a single button press or single command. Colorful Microsoft Excel spreadsheet reports analyze all test results relative to IEEE 802.3at specification parameters, flagging failures and compiling statistics.

The PSE Conformance Test Suite serves as a virtual industry standard for PSE specification compliance. Testing can be completed without deep, internal knowledge of the 802.3at standard and without high expertise in PSA-3402 capabilities. Test coverage **exceeds 95%** of 802.3at PSE PICS.

See Sifos datasheet, **PSE Conformance Test Product Overview**, for further information about this test suite.

802.3at PoE LLDP Emulation and Analysis

The PSA-3402 includes a subsystem designed to flexibly emulate 802.3at LLDP capable PD's (and PSE's) on a per test port basis. Fully automated applications allow in depth capture and analysis of protocol between the PSE and the PD. See Sifos datasheet, **LLDP Emulation**

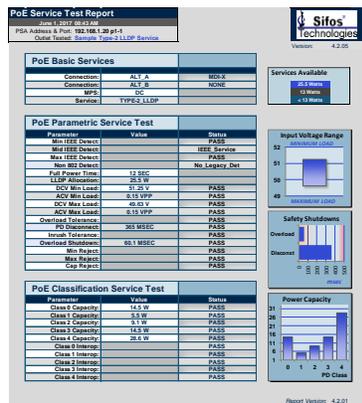

Service Analyzer Report

and **Analysis Overview**, for further information on this topic.

Time	From	To	Type	Requested	Allocated	Port Class	MDI Capability	MDI Status	Power Class	Source	Priority
1.0	PSE	PD	2	19.8	19.8	PSE	YES	OK	4-PRIMARY	LOW	
1.2	PSE	PD	2	22.3	22.3	PSE	YES	OK	4-PRIMARY	LOW	
1.4	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
1.6	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
1.8	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
2.0	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
2.2	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
2.4	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
2.6	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
2.8	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
3.0	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
3.2	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
3.4	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
3.6	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
3.8	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	
4.0	PD	PSE	2	22.3	22.3	PD	N/A	N/A	4-PSE	LOW	

LLDP Protocol Trace

PoE Service Analyzer Application

The PoE Service Analyzer is a special automated test and reporting application to enable comprehensive parametric and interoperability analysis at any PD connection point in a PoE enabled wiring plant. The testing supports **802.3at** Type-1 and Type-2, including Type-2 with LLDP, PoE services. See Sifos datasheet, **PoE Service Analyzer Product Overview**, for further information regarding the PoE Service Analyzer.

Technical Data: PSA-3402

LAN Interface Specifications			
Operating Mode	Signal Path	Parameter	Specification
Data Through Mode	PSE # to THRU #	Connections	RJ45
		Data Rates and Signaling	10/100/1000BaseT/2.5GBaseT 5GBase-T, 10GBase-T with minor impairment
		Latency	None - Passively Coupled
		Impedance	100Ω, Balanced
		Pair-Pair Isolation	≥ 36dB @ 100MHz
		Insertion Loss	≤ 2dB, 0.1MHz to 100 MHz
		Insertion Loss Variation	≤ 0.75dB, 0.1MHz to 100 MHz
		Return Loss (OUT pairs terminated into 100.)	≤ -24dB, 1MHz to 100MHz
Data Connect (LLDP Emulation) Mode	PSE-# to Blade Transceiver	Connection	RJ45
		Data Rate and Signaling	10/100Base-T
		Orientation	MDI End Point
		Protocol	802.1ab, 802.3bc, 802.3at
		Impedance	100Ω, Balanced
		Return Loss	≤-20dB, 1MHz to 100MHz

PoE Port Connections			
Operating Mode	Dependency	Parameter	Selections
2-Pair Power	Port 1 and Port 2 operate independently	Powered Pair	ALT-A or ALT-B
		Polarity	MDI or MDI-X
4-Pair Power:	Connect to Port 1 (Port 2 disabled) or Connect to Port 2 (Port 1 disabled)	ALT-A Polarity (Port 2)	MDI or MDI-X
		ALT-B Polarity (Port 1)	MDI or MDI-X
		Detection Signature Type (PSA-3202 Test Blades)	Single (shared) or Dual (independent)
All	Any Conductor referenced to Any Other Conductor	Maximum Input Voltage	±60 VDC
	Any Conductor referenced to RJ-45 Shield	Maximum Input Voltage	±60 VDC

Detection and AC MPS Specifications			
Description	Conditions	Parameter	Specification
Detection Resistance	Vport = 2.5VDC - 12VDC, Port Connected, Transition Current Load = 0	Range	9 KΩ to 39 KΩ
		Resolution	1 KΩ
		Accuracy vs Setting $\Delta V / \Delta I$ at 4.5 Volt Spacing	±1.75% + 300Ω
		Range	0.14, 5, 7, 11μF
Detection Capacitance	Vport = 2.5VDC - 12VDC, Port Connected, Transition Current Load = 0	Accuracy	±15%
		Range	0.14, 5, 7, 11μF
Detection Signature Cut-Off Threshold	Port Connected	Vport	12V ± 2%
AC MPS Signature	Vport = 12VDC - 60VDC, Port Connected	AC Impedance	24KΩ (0.1μF + 330Ω)
		Resistance Accuracy $\Delta V / \Delta I$ at 2 Volt Spacing	22.8KΩ ± 250Ω
	Port Isolated	AC Impedance (≤ 500 Hz)	≥ 1.1 MΩ
		AC Impedance (≤ 120 Hz)	≥ 3.0 MΩ

Current Load Specifications			
Description	Conditions	Parameter	Specification
Load Current	Per Powered (or classifying) Pairset	Range	0 to 950 mA
		Resolution	0.25 mA
		Accuracy	± (0.5% setting + 0.25mA)
		Slew Rates	> 4mA / μsec
		Activation Voltage	15V, Rising Vport
		De-Activation Voltage	14V, Falling Vport
Transition (Mark Region) Current	Load Current Activated, Per Powered (or classifying) Pairset	Range	0 to 400 mA
		Resolution	0.25 mA
		Accuracy	± (1.0% setting + 0.5mA)
		Slew Rates	> 4mA / μsec
		De-Activation Voltage	PSA-3202: 4.5V, Falling Vport PSA-3102: 6V, Falling Vport
Multi-Event Classification	Multi-Event Activated, Vport > 15VDC	802.3bt Signatures Emulated	Single Signature Class 5 - 8
			Dual Signature Class 1 - 5
	Multi-Event Activated, Vport > 15VDC	Non-Standard Signatures	Class Current per Event
		802.3bt Auto-Class	2mA @ 80msec of LCE1
		Multi-Event Activation	psa_connect or mclass
		Multi-Event Deactivation	psa_disconnect or mclass
		Multi-Event Timeout	100 msec @ > 15V
		Event Start Glitch De-bounce	150μsec
		Mark and Idle Transition Glitch De-bounce	500μsec
		Event Count Reset Condition	< 4.5V for > 500μsec
Power-On Expiration (default)	115 msec		
Configurable Load Transient	Vport > 15VDC, Per Powered Pairset	Sequential Load Steps	2
		Transient Sequence Repeats	1 to 6 cycles
		Load Step 1 Range	0 to 1800 mA
		Load Step 2 Range	0 to 950 mA
		Resolution (0 – 950 mA)	0.25 mA
		Resolution (> 950 mA)	0.50 mA
		Accuracy (0 – 25 mA)	± (2% setting + 0.5mA)
		Accuracy (> 25 mA)	± (1% setting + 1mA)
		Slew Rate	< 10mA / μsec
		Step 1 Duration ≤ 950 mA	200 μsec to 1 sec
		Step 1 Duration > 950 mA	200 μsec to 80 msec
		Step 2 Duration Load Step 1 ≤ 950 mA Load Step 1 > 950 mA	200 μsec to 1 sec (or persist) 1 sec
		Step Resolution	100 μs
		Trigger Modes: ≤ 950 mA > 950 mA	Immediate, Edge, Event Immediate
		Active Load Resistance	37 Ω
		Foldback Suppression Min. Port Voltage (@ 400mA)	30 VDC
Foldback Suppression Duration	Step 1 + Step 2 Duration		

DC Metering Specifications			
Description	Conditions	Parameter	Specification
Voltage Meter	Average, Max-Peak, Min-Peak, Scope Trace	Voltage Range	0 - 60V
		Aperture or Trace Length	256 Samples (10ms, 20ms, 0ms...10s)
		Extended Trace Length ³	1024 Samples (200ms, 2s, 4s, 8s, 20s)
		Sample Rates	39.1 μsec - 39.1 msec (1,2,5 steps)
		Resolution	16 mV

DC Metering Specifications			
Description	Conditions	Parameter	Specification
Voltage Meter (con'd)		Displayed Resolution	Avg & Peak: 2 decimal places O-scope Traces: 25 mV
		Accuracy ¹	> 30VDC: \pm (1.5% reading + 16mV) < 30VDC: \pm (2.0% reading + 16 mV)
		Measurement Triggers	Immediate, Edge, Event, Power-Up (<i>traces only</i>)
Current Meter	Average, Max-Peak, Min-Peak, Scope Trace	Current Range	0 – 2000 mA
		Aperture or Trace Length	256 Samples (10ms, 20ms, 50ms...10s)
		Extended Trace Length ³	1024 Samples (200ms, 2s, 4s, 8s, 20s)
		Sample Rates	39.1 μ sec - 39.1 msec (1,2,5 steps)
		Resolution (0– 1023 mA)	0.25mA
		Resolution (1024–2000 mA)	0.5mA
		Accuracy ²	\pm (0.5% reading + 0.5mA)
Triggers	Immediate, Edge, Event, Power-Up (<i>traces only</i>)		

1. Does not include Voltage drop due to cable losses and 0.45 Ω maximum test port input resistance.
2. Does not include Port-Connected MPS current, which is approximately (V_{port} - 12V)/24k Ω .
3. Scope Traces only

AC Metering Specifications			
Description	Conditions	Parameter	Specification
AC Peak-Peak Meter	Low Band, VDC= 40-57V	Accuracy, 25Hz – 325Hz	-15%, +11%
		Accuracy, 50Hz – 300Hz	-7.5%, +11%
	High Band, VDC= 40-57V	Accuracy, 2.5KHz – 250KHz	-15%, +7%
		Accuracy, 20KHz – 250KHz	-6%, +7%
	Full Band, VDC= 40-57V	Accuracy, 50Hz – 250KHz	-7.5%, +8.5%
	All Bands, VDC= 40-57V	Resolution	1mV
		Range	1Vp-p
Input Impedance		0.05 μ F ¹	

1. Input impedance models the lowest possible PD input capacitance – measurements are therefore affected by the effective source impedance of the PSE, including any frequency specific variations in that source impedance.

Triggering Specifications			
Description	Conditions	Parameter	Specification
Edge & Event Triggers	All Modes	Range	0.25V - 59.5V
		Resolution	0.125 mV
		Accuracy (relative to DC Meter)	\pm 0.0625 mV
		Trig1 to Meter or Transient Latency	~ 50 μ secs
		Event Trigger Latency	< 500 μ secs
	Trigger Noise Immunity	Pre-Trigger Qualification Time (Voltage below Rising threshold or above Falling threshold)	1.5 msec
		Normal Mode Edge Noise Rejection	125 mV
		Noisy Mode Edge Noise Rejection	500 mV

Time Interval Metering Specifications			
Description	Conditions	Parameter	Specification
Time Interval Meter	Microsecond scale	Time Range	4 – 26200 μ s
		Time Resolution	1 μ sec
		Time Accuracy	\pm 2 μ secs
		Min. Resolvable Time Interval	~ 4 μ secs
	Millisecond scale	Time Range	2-6550 msec
		Time Resolution	0.1 msec
		Time Accuracy	\pm 1 msec
		Min. Resolvable Time Interval	2 msec

Time Interval Metering Specifications			
Description	Conditions	Parameter	Specification
Time Interval Meter (con'd)	Second Scale	Time Range	0.1 – 16.1 sec
		Time Resolution	0.1 sec
		Time Accuracy	± 50 msec
		Min. Resolvable Time Interval	0.1 sec
	Triggering & Noise Immunity	Start Trigger	Edge or Event
		Stop Trigger	Edge
		Normal Mode Edge Noise Rejection	125 mV
		Noisy Mode Edge Noise Rejection	500 mV

LED Indicators – PSA-3202		
LED Label	Parameter	Description
LINK	LLDP Link Status & Activity	GREEN: Linked at 100Base-Tx for LLDP, Blink with Activity AMBER: Linked at 10Base-T for LLDP, Blink with Activity OFF: Unlinked (or Disconnected)
PD	PoE Power Status	GREEN: PSE powered with Vport > 36 VDC AMBER: Valid 802.3 Detection Signature Connected (No PSE Power) OFF: PSE not powered & PD signature not connected
4PR	Test Port Mode	GREEN: Test port configured for 4-Pair powering AMBER: Opposite test port configured for 4-Pair powering OFF: Test port configured for 2-Pair powering
COM	Communications	ON: Indicates active communications with test port

Programming and Control	
Description	Specification
Interface	Ethernet 10/100BaseT (Telnet Port 23 protocols) NOTE: The Console interface is for IP Address config only.
Host Requirements	PC running Microsoft Windows XP, Vista, 7, 8, 10, or Linux PC (Fedora, SUSE, Debian)
Control Environment	Sifos PowerShell PSA or PSA-Interactive
Recommended Network Latency:	< 5 msec

Physical and Environmental	
Description	Specification
Dimensions	7.5"W x 3"H x 10"D
Weight	3.2 lbs.
Power	100VAC-240VAC, 50-60 Hz, 1.3A Max.
Ambient Operating Temperature	0°C to 40°C (≤ 100W combined PoE loading on both test ports)
Storage Temperature	-20°C to 85°C
Operating Humidity	5% to 95% RH, Non-Condensing.

Certifications		
Description	North America	Europe & International
Emissions	FCC Part 15, Class A	Meets EN55011 VCCI, AS/NZS 3548, ICES-001
Safety	CSA Listed (CSA22.2 No. 61010)	Meets EN61010-12
European Commission		Low Voltage Directive (2014/35/EU) Electromagnetic Compatibility Directive (2014/30/EU) CE Marking Directive (93/68/EEC)
<p>FCC Statement:</p> <p>This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.</p>		

Ordering Information

PSA-3402, PowerSync Analyzer 3402 including PowerShell PSA and PSA Interactive Software

PSA-LLDP, IEEE 802.3at LLDP Emulation and Analysis Feature for One PSA PSA-3402 Instrument

PSA-CT, IEEE 802.3at PSE Conformance Test Suite for One PSA-3402 Instrument

PSA-TS1, IEEE 802.3at PSE Conformance Suite Tracking Service for One Year for One PSA-3402 Instrument

PSA-TS2, IEEE 802.3at PSE Conformance Suite Tracking Service for Two Years for One PSA-3402 Instrument

CASE-PDA, Protective Carrying Case for Transporting PSA-3402 and Accessories

RACKKIT-PDA, Rack Mount Kit for PSA-3402

- Accessories Included:**
- Installation Guide & Configuration Chart
 - PowerSync Analyzer Reference Manual (Binder and CD)
 - Power Cord
 - Cross-Over Ethernet Cable
 - RS-232 Cable



Optional Carrying Case for
PSA-3402

Sifos Technologies, Inc.
1 Tech Drive, Suite 100
Andover, MA 01810
+1 (978) 975-2100
www.sifos.com
sales@sifos.com

Verification, *Simplified.*